

Tag: \_\_\_\_\_ Engineer: \_\_\_\_\_  
 Project: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Location: \_\_\_\_\_ Architect: \_\_\_\_\_  
 Date: \_\_\_\_\_ Submitted by: \_\_\_\_\_



**Model HAD**  
 Hinged Access Door

## Specifications:

**DOOR PANEL:** 24 gauge galvanized steel

**FRAME:** 22 gauge galvanized steel

**INSULATION:** 1" (25) fiberglass

**PRE-FORMED TABS:** 22 gauge galvanized steel


Standard construction to 4.5" S.P.

All dimensions shown in inches, parentheses ( ) indicate millimeters.

## Standard Sizes:


Model-Quantity	Size	Dim. A Width	Dim. B Height	Frame Neck OD	# of had-1 Cams	# of had-2 Cams
	6 x 6	6	6	4-7/8" x 4-7/8"	2	1
	8 x 8	8	8	6-7/8" x 6-7/8"	2	1
	10 x 10	10	10	8-7/8" x 8-7/8"	2	1
	12 x 12	12	12	10-7/8" x 10-7/8"	2	1
	14 x 14	14	14	12-7/8" x 12-7/8"	2	1
	16 x 16	16	16	14-7/8" x 14-7/8"	4	2
	18 x 18	18	18	16-7/8" x 16-7/8"	4	2
	20 x 20	20	20	18-7/8" x 18-7/8"	4	2
	24 x 24	24	24	22-7/8" x 22-7/8"	4	2

MODEL HAD1

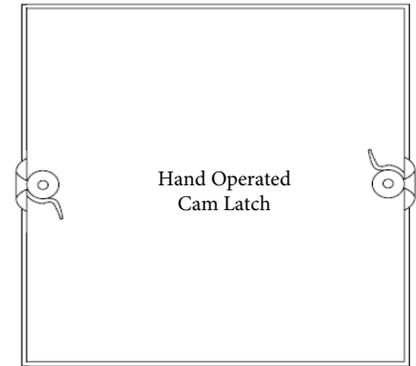


Hand Operated  
Cam Latch

MODEL HAD2

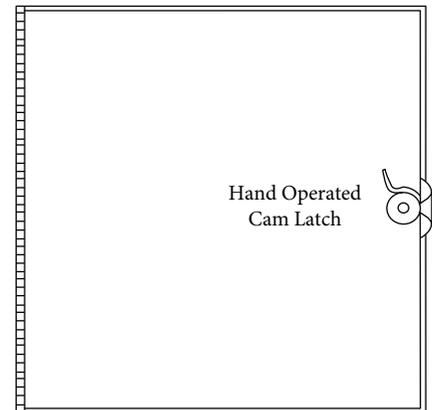

Hand Operated  
Cam Latch

## TYPICAL DOUBLE PANEL ACCESS DOOR

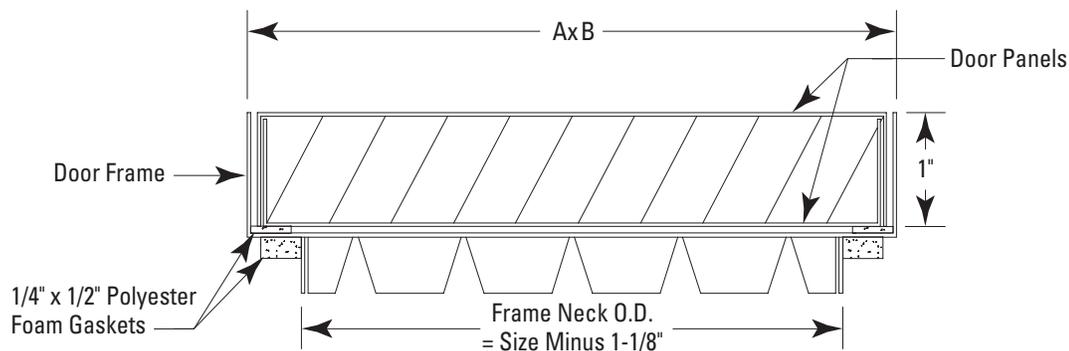

As part of our continuous improvement program, we reserve the right to make further improvements without notice.

Submittal - Model HAD