




# MODEL ACL

## ACOUSTIC LOUVERS

Project:
Tag:
Engineer:
Contractor:
Date:


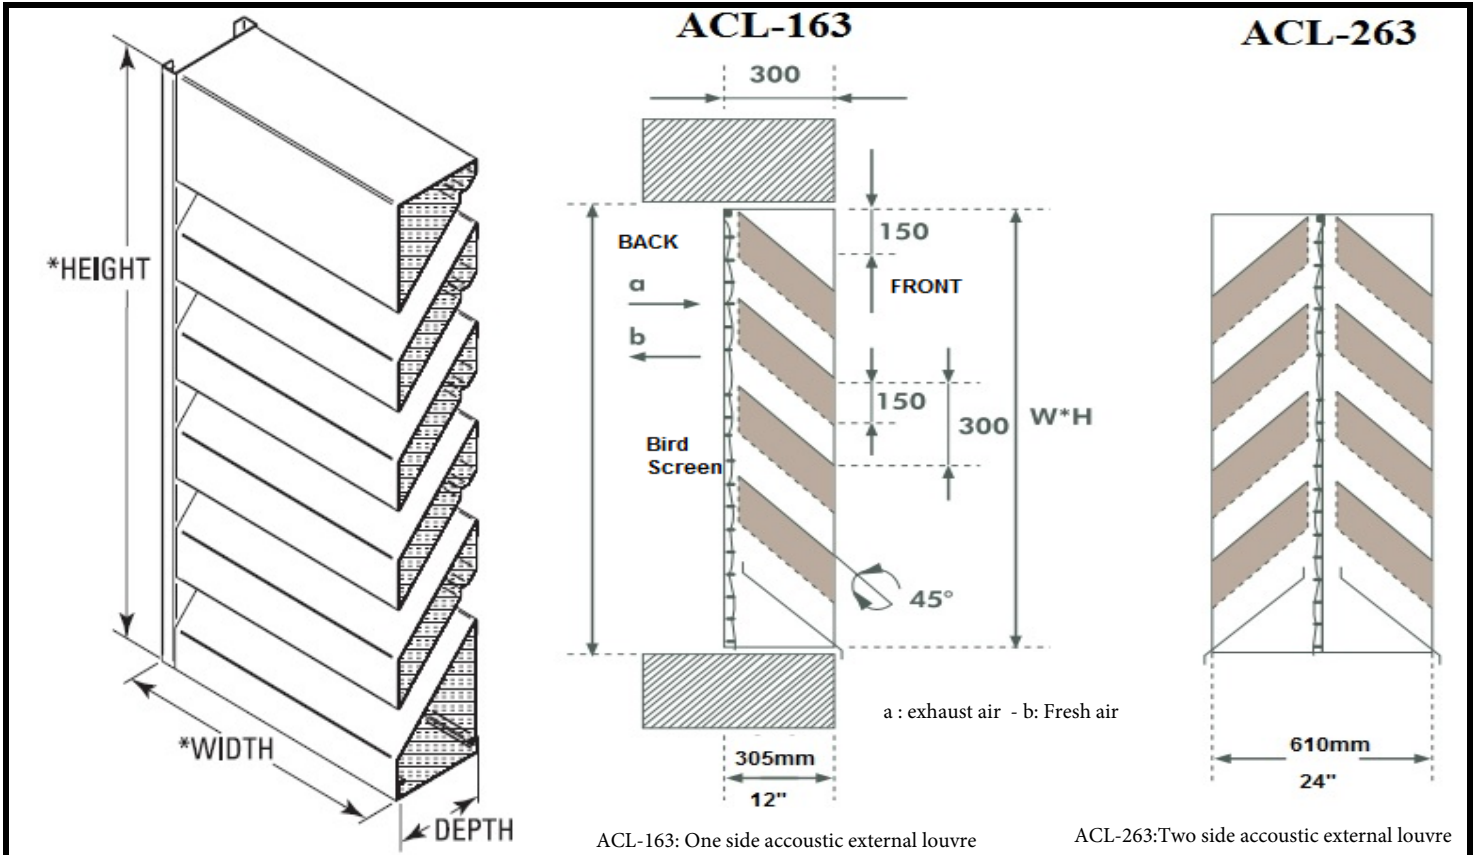


### ACOUSTIC PERFORMANCE

ATTENUATION TYPE	OCTAVE BAND CENTER FREQUENCIES							
	63Hz	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	8000Hz
FREE-FIELD NOISE REDUCTION ( dB )	9	10	10	13	20	21	17	17
TRANSMISSION LOSS ( dB )	3	4	4	7	14	15	11	11

NOTES: DATA OBTAINED IN ACCORDANCE WITH ASTM E90 TEST STANDARD FOR TRANSMISSION LOSS.  
63Hz AND 8000Hz OCTAVE BANDS ARE ESTIMATED VALUES DERIVED FROM TEST DATA

### TYPICAL INSTALLATION DETAILS

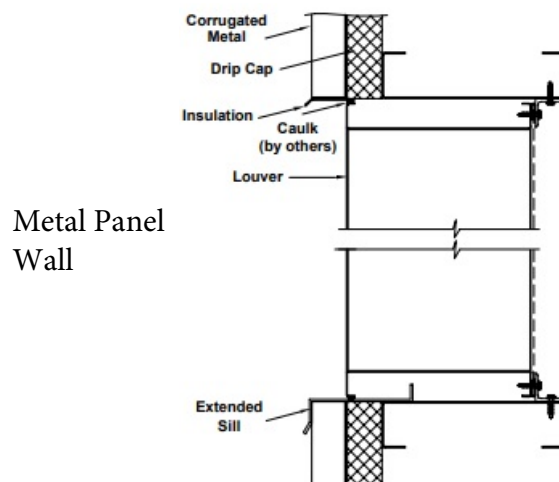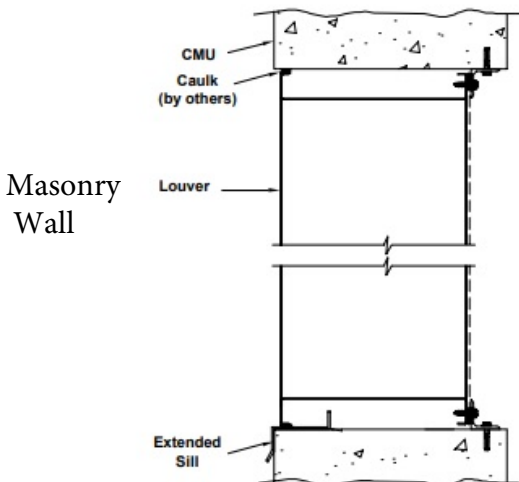

As part of our continuous improvement program, we reserve the right to make further improvements without notice.

Date submitted: